

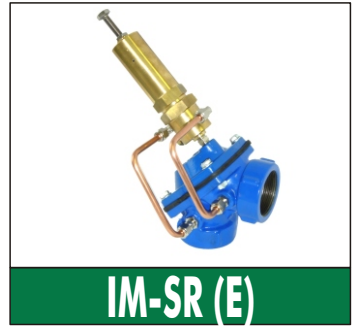
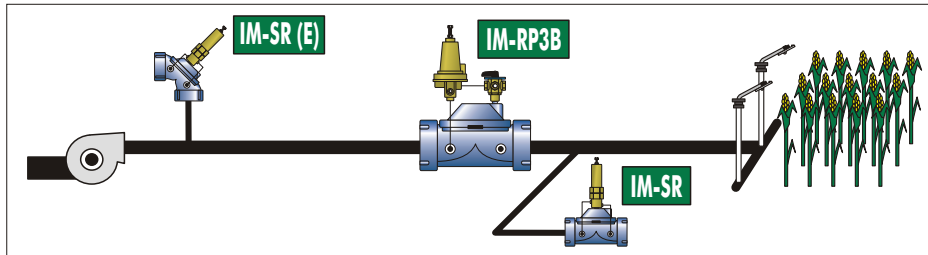


быстрый Сброс / Quick Relief / Alívio Rápido / Décharge Rapide

	Код	Ø		Евро
		mm	Дюйм	
 THREADED TARAUDE  Нарезной ROSCADO	IMISR000001*M	25	1"	
	IMISR001"1/4M	32	1"¼	
	IMISR001"1/2M	40	1"½	
	IMISR000002*M	50	2"	
	IMISR00002*EM	50	2"	
	IMISR002"1/2M	65	2"½	
	IMISR00003*AM	80	3"	
	IMISR00003*CM	80	3"	
	IMISR00003*EM	80	3"	
	IMISR00003*FM	80	3"	
	IMISR00004*FM	100	4"	

	Код	Ø		Евро
		mm	Дюйм	
 FLANGED BRIDES  Фланцевый BRIDADO	IMISR0000050F	50	2"	
	IMISR0000065F	65	2"½	
	IMISR0000080F	80	3"	
	IMISR000080PF	80	3"	
	IMISR000080EF	80	3"	
	IMISR0000100F	100	4"	
	IMISR000100EF	100	4"	
	IMISR0000125F	125	5"	
	IMISR0000150F	150	6"	
	IMISR0000200F	200	8"	
	IMISR0000250F	250	10"	
	IMISR0000300F	300	12"	
	Ø 350-400-500 (14"-16"-20")			




Стандарт 1,0 ÷ 10,0 bar  
Дополнительно 1,5 ÷ 22,0 bar  
PN25



Помповый контроль / Pump Control / Control de Bomba / Contrôle de Pompe

	Код	Ø		Евро
		mm	Дюйм	

	Код	Ø		Евро
		mm	Дюйм	
 FLANGED BRIDES  Фланцевый BRIDADO	IMICP0000050F	50	2"	
	IMICP0000065F	65	2"½	
	IMICP0000080F	80	3"	
	IMICP000080PF	80	3"	
	IMICP000080EF	80	3"	
	IMICP0000100F	100	4"	
	IMICP000100EF	100	4"	
	IMICP0000125F	125	5"	
	IMICP0000150F	150	6"	
	IMICP0000200F	200	8"	
	IMICP0000250F	250	10"	
	IMICP0000300F	300	12"	
	Ø 350-400-500 (14"-16"-20")			





Стандарт 24V AC  
50 ÷ 60 Hz  
N.C. PN16  
Дополнительно 24-110-220V  
50 ÷ 60 Hz  
N.O.



220V AC  
50 ÷ 60 Hz  
N.C. 24-110-220V  
50 ÷ 60 Hz  
N.O.

Контроль Альтиметром (высотометр) / Altimetric Control / Control Altimetrico / Contrôle Altimétrique

	Код	Ø		Евро
		mm	Дюйм	
 THREADED TARAUDE  Нарезной ROSCADO	IMALT00001*M	25	1"	
	IMALT01"1/4M	32	1"¼	
	IMALT01"1/2M	40	1"½	
	IMALT00002*M	50	2"	
	IMALT0002*EM	50	2"	
	IMALT02"1/2M	65	2"½	
	IMALT0003*AM	80	3"	
	IMALT0003*CM	80	3"	
	IMALT0003*EM	80	3"	
	IMALT0003*FM	80	3"	
	IMALT0004*FM	100	4"	

	Код	Ø		Евро
		mm	Дюйм	
 FLANGED BRIDES  Фланцевый BRIDADO	IMALT000050F	50	2"	
	IMALT000065F	65	2"½	
	IMALT000080F	80	3"	
	IMALT00080PF	80	3"	
	IMALT00080EF	80	3"	
	IMALT000100F	100	4"	
	IMALT00100EF	100	4"	
	IMALT000125F	125	5"	
	IMALT000150F	150	6"	
	IMALT000200F	200	8"	
	IMALT000250F	250	10"	
	IMALT000300F	300	12"	
	Ø 350-400-500 (14"-16"-20")			



Стандарт PN16  
Дополнительно 20 m.c.a.  
30 m.c.a.  
40 m.c.a.



Дополнительные функции / Additional Functions / Funciones Adicionales / Fonctions Supplémentaires



IM-ALT + EL-BI	Бистабильный Соленоид / Latch solenoid / Solenoide latch / Solenoide latch (9-12V DC PN10)	Евро
IM-ALT + EL-OT	3-х ходовой Латунный Соленоид / Brass 3-way solenoid / Solenoide de 3 vías latón / Solenoide 3 voies laiton	Евро
IM-ALT + EL-16	3-х ходовой Соленоид PN16 / PN16 3-way solenoid / Solenoide de 3 vías PN16 / Solenoide 3 voies PN16	Евро